


ST-512 IF To IF Converter

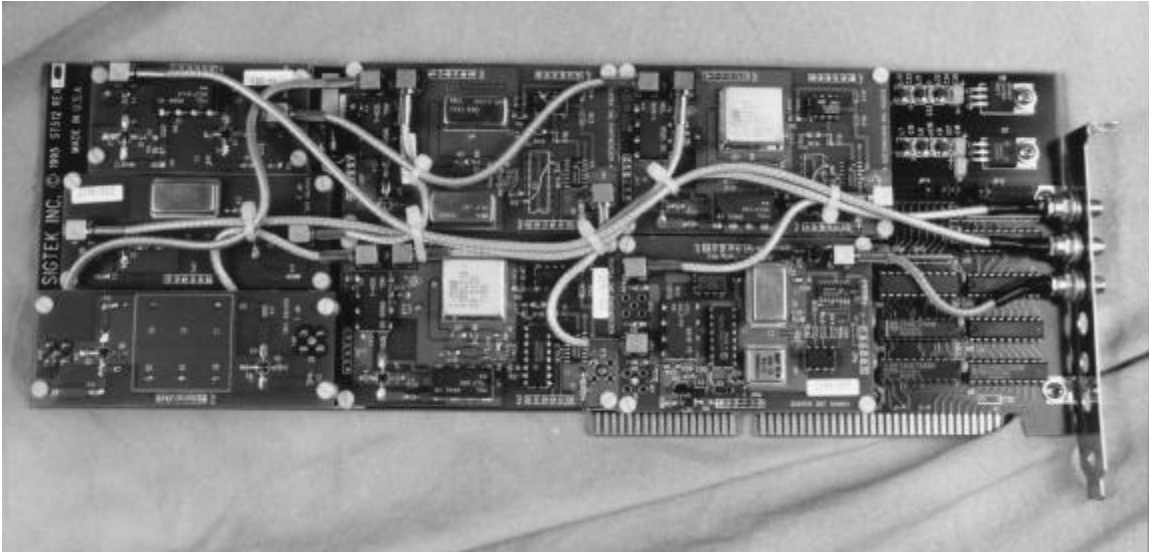

Low Spurious And Phase Noise IF Translation For The PC

Key Features

- Input Frequency 70, 140, and 160 MHz (Software Selectable)
- Output Frequency 10 and 21.4 MHz (Software Selectable)
- Bandwidth 8, 16 MHz
- Phase Noise -70 dBc/Hz @ 1kHz
- Gain Approx. 0 dB
- Max. Output Power -20 dBm
- Spurious Distortion -50 dB
- IP3 +10 dBm
- 1 dB Compression 0 dBm
- Windows Control Software
- External 10 MHz Reference